





SHELVING

"AI" modular shelving for food storage in cold rooms are characterized by their stability and solidity properties, combined with quick assembly, easy-cleaning and friendly usage.

Apart from cold rooms, their attractive design and their versatility make them suitable also for shops, catering industry, hotels and professional kitchens.

We currently produce 2 shelving models, which are described in detail in the corresponding sections. Despite their different peculiarities, they all have in common the utmost attention we always pay to end products.

LIGHT SHELVING M/M-I SHELVES



STRONG SHELVING P/Q/P-I/Q-I SHELVES



LIGHT SHELVING COST-EFFECTIVE MODULARITY



Light

Available compositions




This is our best selling line for cold rooms. With lengths available every 3,2 cm, it combines top quality features and high modularity at a very competitive price

	<p>Made to measure. High modularity. Lengths available every 32 mm</p>		
<p>AL+PP + AISI 304</p>	<p>Anodized aluminium alloy structure + copolymer polypropylene staves + AISI 304 stainless steel cover</p>	 <p>-30°</p>	<p>Tested in cold rooms (down to - 30° C)</p>
	<p>Long-lasting stability, no rust, 10-year warranty against water and moisture corrosion</p>		<p>Adjustable feet</p>
  <p>EN AW-6060</p>	<p>Suitable for direct food contact, in compliance with European Community requirements</p>		<p>Easy and quick assembly: snap-fit, no special tool needed</p>
	<p>Designed according to European security requirements</p>	<p>HACCP</p>	<p>Easy to clean and sanitize in accordance with HACCP</p>
	<p>Stable and resistant: no anchor plates, stabilizer bars or cross joints, no plastic connections</p>		<p>Removable staves, washable in dishwasher</p>
	<p>Open-faced corner compositions for storage optimization</p>		<p>Max. load capacity certified according to Eurocode 9. Up to 240 kg per each shelf</p>

Shelves with polypropylene perforated staves. The picture above shows the single stave model, suitable for 30, 40 and 45 cm. (you can see how staves can be removed).

M

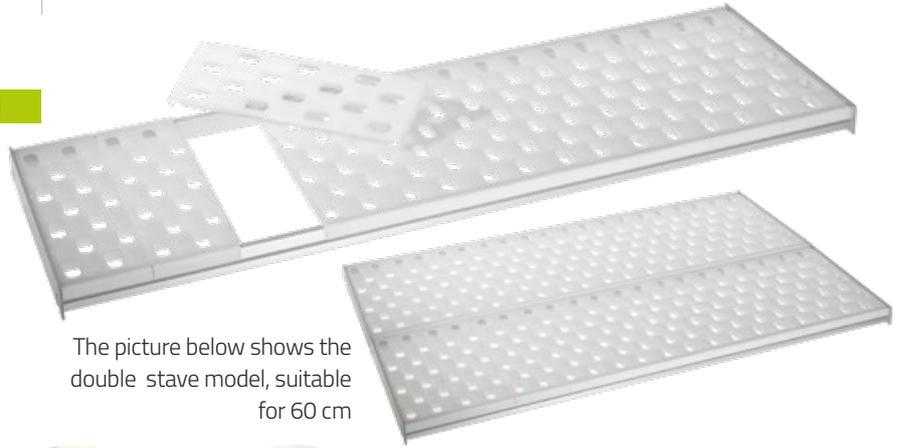


The picture below shows the double stave model, suitable for 60 cm

Some examples of load for "M/M-I" shelves. Measures are expressed in kg, with equally distributed load:

"M/M-I"	WIDTH		
	cm	30-45	60
LENGTH	70	240	240
	100	240	240
	145	125	150

kg

Max. load capacity for shelves with hooks (in corner compositions): 100 kg

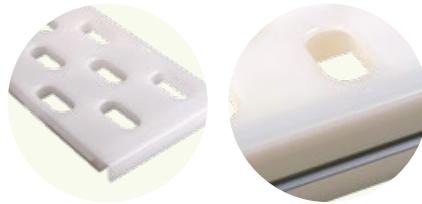

Shelf with AISI 304 stainless steel cover

M-I



Hanging bars for salami with 2 oval bars. Available also with 3 bars (code 135M) or 4 bars (code 136M)

134M



PVC triangle caps for the top of the "T shaped" upright.

2305M



2305M

2307M

2315M

Pin and clip system for "M/M-I" shelves

2307M

Caps for unused upright holes

2315M

Pair of hooks for shelves with perforated staves.

2310M

Pair of hooks for shelves with stainless steel cover.

2311M-I



2310M

2311MI

15 cm

"T shaped" 40x45x2,5 mm

2300M

In the picture, with foot and pin and clips on. Standard measures 155/165/185/205 cm. Different measures available on demand.

Adjustable foot for "T shaped" upright.

2308M




2308M

2300M

STRONG SHELVING FOR HIGH LOADS



Available compositions

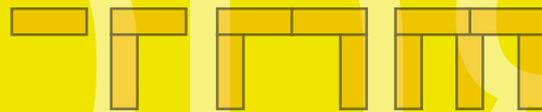

This line, meant for heavy duties, is particularly solid and stable. One single standard module can be 200 cm long and 90 cm wide.

	Max. load capacity certified according to Eurocode 9. Up to 700 kg per each shelf		Tested in cold rooms (down to - 30° C)
AL+PP +AISI 304	Anodized aluminium alloy structure + copolymer polypropylene staves + AISI 304 stainless steel cover		Adjustable feet
	Long-lasting stability, no rust, 10-year warranty against water and moisture corrosion		Easy and quick assembly: snap-fit, no special tool needed
 EN AW-6060	Suitable for direct food contact, in compliance with European Community requirements	HACCP	Easy to clean and sanitize in accordance with HACCP
	Designed according to European security requirements		Removable staves, washable in dishwasher
	Stable and resistant: no anchor plates, stabilizer bars or cross joints, no plastic connections		High variety of depths. Standard: 30, 40, 45, 60, 70, 75, 80, 85, 90 cm
	Open-faced corner compositions for storage optimization		Made to measure. Lengths every 32 mm (Q and Q-I shelves) and every 90 mm (P shelf)

STRONG shelving components

Shelf with polypropylene staves (each stave is 50 mm and the space between staves is 40 mm). The picture above shows the single stave model, suitable for 30, 40 and 45 cm (you can see how staves can be removed)

P



Some examples of max. Load capacity for each shelf, with equally distributed load:

"P/P-I"		WIDTH		
LENGTH	cm	30-45	60-90	
	100	725	695	
	127	510	435	
	154	350	295	

kg

The picture below shows the double stave model, suitable for 60, 70, 75, 80, 85 and 90 cm.

"Q/Q-I"		WIDTH		
LENGTH	cm	30	40-90	
	100	660	440	
	125	500	500	
	152	320	320	

kg



Max. load capacity for shelves with hooks: 100/200 kg according to the composition

Shelves with polypropylene perforated staves, assembled side by side (you can see how staves can be removed)

Q

Shelf with AISI 304 stainless steel cover. P-I and Q-I shelves can be combined with P and Q shelves, respectively

P-I/Q-I

Hanging bars for salami with 2 oval bars Available also with 3 bars (code 135P) or 4 bars (code 136P)

134P/Q



Triangle caps for the top of the "T shaped" upright

2305P/Q



Pin and clip system for "P/Q/P-I/Q-I" shelves.

2307P/Q

Caps for unused upright holes

2315P/Q



Pair of hooks for shelves with staves.

2310P

Pair of hooks for shelves with perforated staves.

2310Q

Pair of hooks for shelves with stainless steel cover.

P-I/Q-I



"T shaped" 50x60x4 mm In the picture, with foot and pin and clips on. Standard measures 150/180/200 cm. Different measures available on demand.

2300P/Q



15 cm


2300P/Q

Adjustable foot for "T shaped" upright.

2312P/Q

2312P/Q

WALL SHELVES

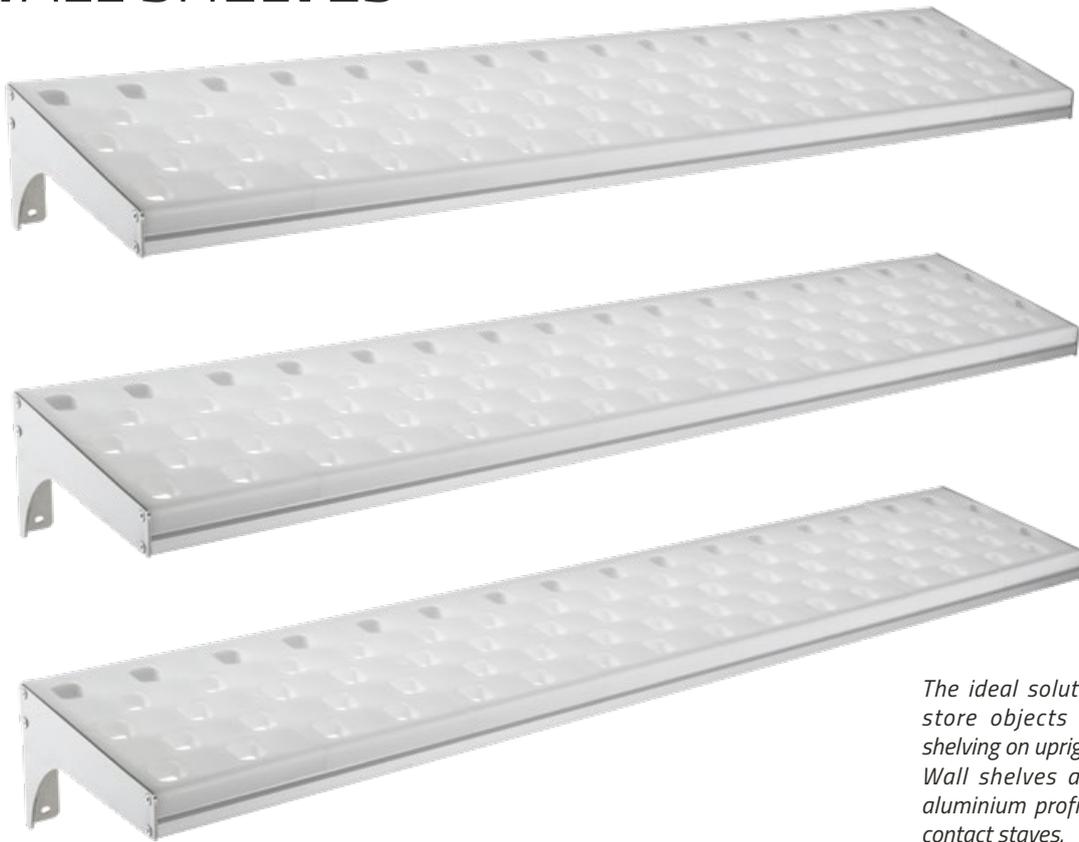

The ideal solution to optimize space and store objects also where a traditional shelving on uprights cannot be used.

Wall shelves are composed of anodised aluminium profiles and polypropylene food contact staves.

Lateral supports, which are integrated into the shelf itself, are made of AISI 304 stainless steel.

Measures and load capacities are studied according to clients' needs.

DUNNAGE RACKS



Dunnage racks are usually used to store crates and foodstuff off the floor, but are suitable also to different purposes. They can be made to measure with shelves of our Light, Strong and Classic lines (for technical features, please refer to corresponding section).

In the picture a dunnage rack measuring 120x45h25 cm